


CrystalView™ Pro

Irrigation System

Market Release Document

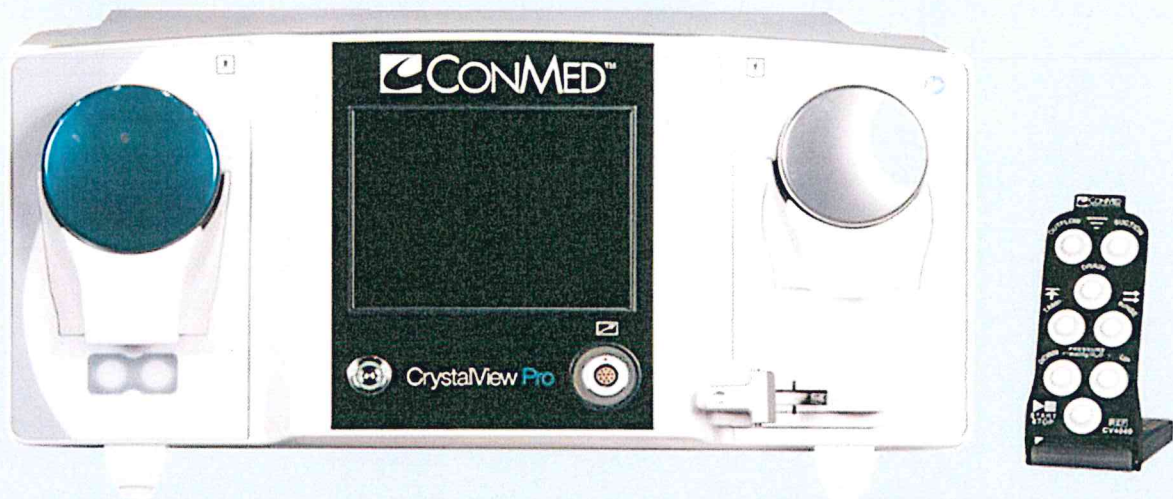

 CONMED

TECHNICAL SPECIFICATIONS

CV4000 Console

Classification:	Class 1, Type BF applied parts
Protection Ingress of Fluids:	IPX2, dripping (15° tilted)
Mode of Operation:	Continuous operation, with intermittent loading
Input Voltage:	100 - 240 VAC
Frequency:	50/60 Hz
Line (Touch) Leakage:	< 100 μ A, normal condition < 500 μ A, single fault condition,
Power Consumption:	150VA
Fuses:	T3.15AH 250 V
Fluid Pressure Range:	10 - 150 mmHg (\pm 20 mmHg) (Factory default at 30 mmHg)
Console Flow Rate:	0 - 2500 (\pm 20%) mL/minute
Dimensions:	16.2 in. (W - front), 13.9 in. (W - back), 7.6 in. (H) 16.6 in. (D) 41.1 cm (W - front), 35.3 cm (W - back), 19.3 cm (H), 42.2 cm (D)
Weight:	18.5 lbs. (8.4 kg)

CV4040 Remote Control

CV4040 Remote Control	
Classification:	Class 1
Mode of Operation:	Continuous
Method of Sterilization	Steam Sterilization per ISO 11137—The minimum autoclave cycle for the CV4040 remote is 4 min exposure with 8 minute dry at 270F for pre-vacuum (wrapped), and 30 minute exposure with 8 minute dry at 250F for gravity (wrapped).
Material:	Silicone This remote control is a latex-free product.
Overall Dimensions:	2.2 in. (5.56cm) wide, 5.9 in. (14.92cm) length, 0.78 in. (1.98cm) depth, 10.5 feet (3.20m) cable length
Weight:	Approximately 13.0 oz. (368 g)